



125M / 155M 1X9 100BASE-ZX Transceiver

Duplex SC, 1550nm DFB, SMF 80KM, LVPECL / PECL Signal Detection

Part Number: F1X9-A1-S15-80P



Overview

F1X9-A1-S15-80P 1X9 SIP package style transceivers are compliant with the industrial standard specification. The high performance uncooled 1550nm DFB transmitter and high sensitivity PIN receiver provide superior performance for Fast Ethernet and SONET OC-3 / SDH STM-1 applications up to SMF 80km optical links.

Applications

- Fast Ethernet 100BASE-ZX @125M
- SONET OC-3 / SDH STM-1 @155M

Features

- Compatible with Fast Ethernet 100BASE-ZX
- Compliant with SONET OC-3 LR-2 and SDH STM-1 L1.2
- Industry Standard 1x9 Footprint
- 1550nm DFB laser transmitter
- Duplex SC connector
- Single 3.3V or 5V Power Supply
- DC-coupled Differential PECL inputs and outputs
- LVPECL / PECL Signal Detection Output
- Wave Solderable and Aqueous Washable
- Link distance 80km over SM fiber
- RoHS Compliant

Laser Safety

- This is a Class 1 Laser Product complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019.
- Caution: Use of control or adjustments or performance of procedure other than those specified herein may result in hazardous radiation exposure.



Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit
Storage Temperature	T _{ST}	-40	+85	°C
Storage Relative Humidity	RH	5	95	%
Supply Voltage (F1X9-A1-S15-80P)	V _{CC}	0	+4.5	V
Supply Voltage (F1X9-A1-S15-80P5)	V _{CC}	0	+6.0	V

Recommended Operating Conditions

Parameters	Symbol	Min.	Typ.	Max.	Unit
Case Operating Temp. (F1X9-A1-S15-80P)	T _{OP}	0	-	+70	°C
Case Operating Temp. (F1X9-A1-S15-80Pi)	T _{OP}	-40	-	+85	°C
Supply Voltage (F1X9-A1-S15-80P)	V _{CC}	+3.13	+3.3	+3.47	V
Supply Voltage (F1X9-A1-S15-80P5)	V _{CC}	+4.75	+5.0	+5.25	V
Supply Current	I _{CC}			300	mA
Power Consumption	P			1000	mW
Lead Soldering Limits	T _{sold}			260/10	°C/Sec

Transmitter Electro-optical Characteristics

T_{OP} = 0 °C to 70 °C (F1X9-A1-S15-80P); T_{OP} = -40 °C to 85 °C (F1X9-A1-S15-80Pi)

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Data Rate	DR		125	155	Mb/s	
Optical Launch Power	P _o	-6		0	dBm	1
Optical Center Wavelength	λ _c	1510	1550	1570	nm	
Spectral Width (-20dB)	Δλ			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Optical Extinction Ratio	ER	8.2			dB	
Optical Eye Mask		IEEE802.3ah and ITU-T G.957				
Optical Rise/Fall Time (20%~80%)	T _r / T _f			2	ns	
Differential Data Input Swing	V _{IN}	400		2000	mV	
Data Input Voltage-Low	V _{IL} -V _{CC}	-1.81		-1.48	V	
Data Input Voltage-Hight	V _{IH} -V _{CC}	-1.16		-0.88	V	

Note1: The optical power is launched into a 9/125μm single mode fiber.



Receiver Electro-optical Characteristics


$T_{OP} = 0^{\circ}\text{C to } 70^{\circ}\text{C}$ (F1X9-A1-S15-80P); $T_{OP} = -40^{\circ}\text{C to } 85^{\circ}\text{C}$ (F1X9-A1-S15-80Pi)

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Data Rate	DR		125	155	Mb/s	
Receiver Sensitivity	SEN			-34	dBm	1
Maximum Receive Power	PRX-MAX	-3			dBm	1
Optical Center Wavelength	λ_c	1100		1600	nm	
Signal Detect Assert	SDA			-34	dBm	
Signal Detect De-Assert	SD _D	-46			dBm	
Signal Detect Hysteresis	SD _{HY}	0.5			dB	
Data Output Rise/Fall Time (20%~80%)	Tr / Tf	0.5			ns	
Differential Data Output Swing	V _{OUT}	500		1200	mV	
Data Output Voltage-Low	V _{OL} -V _{CC}	-2.0		-1.58	V	
Data Output Voltage-Hight	V _{OH} -V _{CC}	-1.1		-0.74	V	
Signal Detect O/P Voltage Low	V _{SDL} -V _{CC}	-2.0		-1.58	V	
Signal Detect O/P Voltage High	V _{SDH} -V _{CC}	-1.1		-0.74	V	

Note1: Measured with a PRBS 2²³-1 test pattern @155Mbps BER<10⁻¹².



Pin Assignment

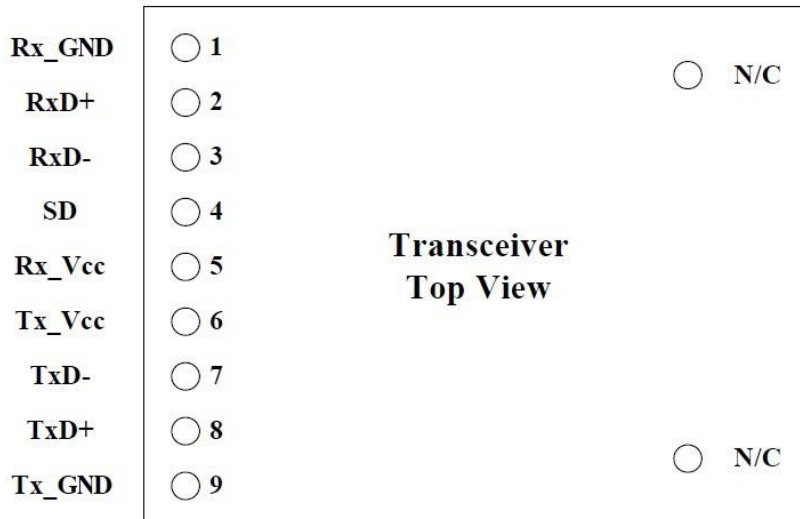


Pin Description

Pin	Name	Function / Description
1	Rx_GND	Receiver Signal Ground
2	RxD+	Receiver Non-inverted Data Out
3	RxD-	Receiver Inverted Data Out
4	SD	Signal Detect is used to open collector output with PECL/LVPECL level Normal optical input levels to the receiver result in a logic "1" output
5	Rx_Vcc	Receiver Power Supply
6	Tx_Vcc	Transmitter Power Supply
7	TxD-	Transmitter Inverted Data In
8	TxD+	Transmitter Non-inverted Data In
9	Tx_GND	Transmitter Signal Ground



Mechanical Dimensions

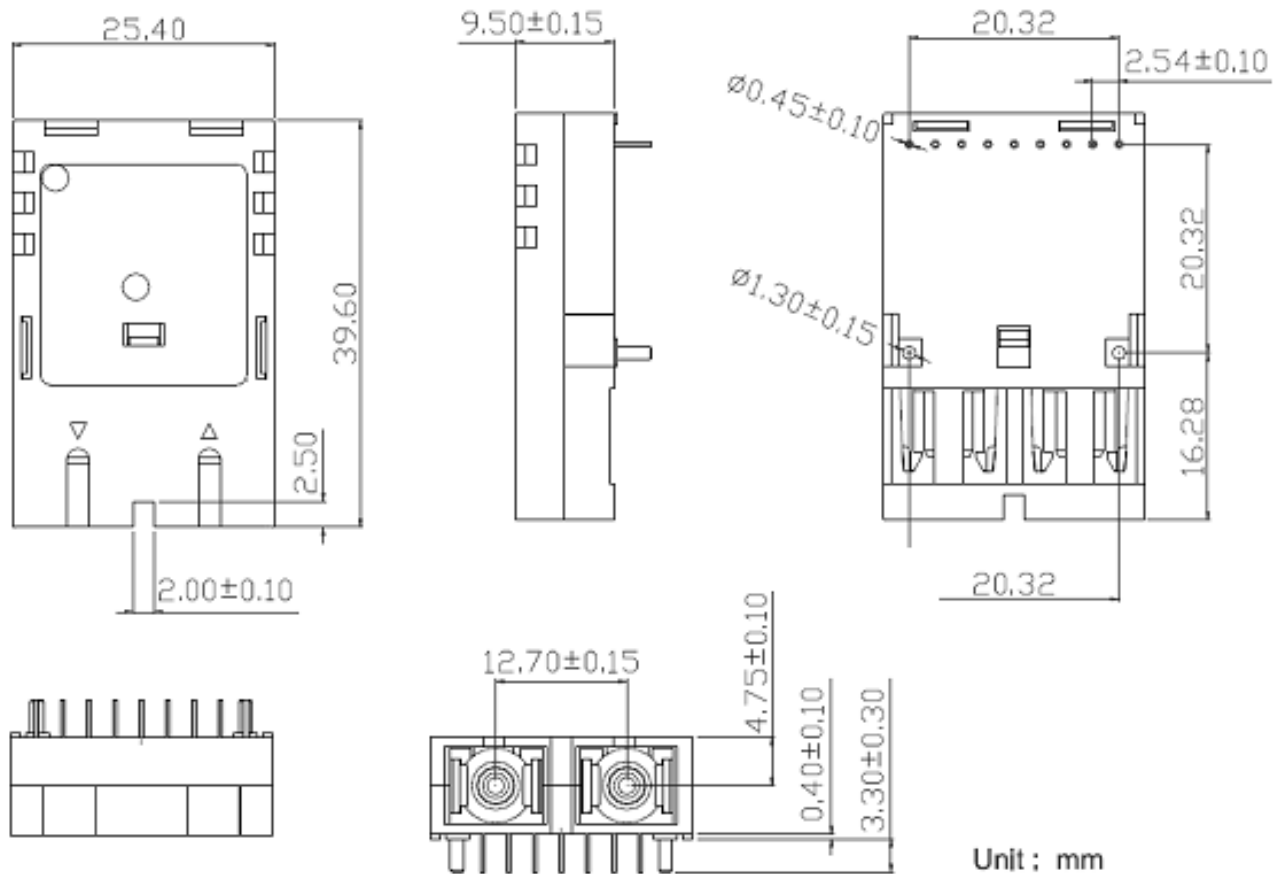

(All Dimensions are $\pm 0.20\text{mm}$ Unless Otherwise Specified, Unit: mm)

Ordering Information

Part No.	Tx	Rx	Conn.	I/O	SD	Link	Voltage	Temp.
F1X9-A1-S15-80P	1550nm	1100nm ~ 1600nm	SC	DC/DC	LVPECL	SMF 80km	3.3V	0~70°C
F1X9-A1-S15-80Pi					LVPECL		3.3V	-40~85°C
F1X9-A1-S15-80P5					PECL		5V	0~70°C
F1X9-A1-S15-80P5i					PECL		5V	-40~85°C

Note: Distances are indicative only. To calculate a more precise link budget based on specific conditions in your application, please refer to the optical characteristics.